

Rittal – The System.

Faster – better – everywhere.

Fan-and-filter units – SK 3327.107

Date : Mar 13, 2017

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Fan-and-filter units – SK 3327.107

created: 13.03.2017 build on www.rittal.com/in-en

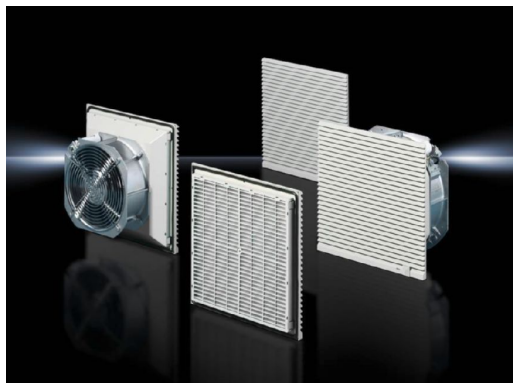

Product description

Colour: RAL 7035

**Protection category
IP to IEC 60 529:** IP 54
With hose-proof hood: IP 56
With fine filter mat or hose-proof hood: Up to IP 55 is achieved in conjunction with additional fine filter mat

Supply includes: Complete unit ready to install, including filter mat

Note: For energy-efficient operation of the fan-and-filter units, we recommend using the enclosure internal thermostat, the speed control or the digital enclosure internal temperature display and thermostat

Product features

**Rated operating
voltage:** 230 V, 1~, 50 Hz/50 Hz

Dimensions: Width: 323 mm
Height: 323 mm

**Required mounting
cut-out:** Width: 292 mm
Height: 292 mm

Build depth: 157.5 mm

Temperature range: Bearing: -30°C...+70°C

**Power consumption
Pel:** At 50 Hz: 64 MW
At 60 Hz: 80 W

Rated current (max.):	At 50 Hz: 29 mA At 60 Hz: 55 mA
Pre-fuse:	Miniature circuit-breaker/fuse:
Packs of:	1 pc(s).
EAN:	4028177235816

2017 © Rittal India Pvt. Ltd.